

ET12 software and voice upgrade

ET12 upgrade environment only supports WINDOWS system!

Unzip the upgrade pack (unzip to English path), which contains the following folders:

Upgrade driver package: Hardware driver

Transmitter upgrade package: ET12 transmitter upgrade package _V1.1.16

Transmitter voice package: ET12 voice package


=====

Transmitter upgrade tool name: ET12 transmitter. exe


First upgrade! Please note to **install the driver firstly!**

1st step: Hardware driver installation


▲ Distinguish computer 32-bit operating system, 64-bit operating system,
Find "my computer", "properties" can be viewed

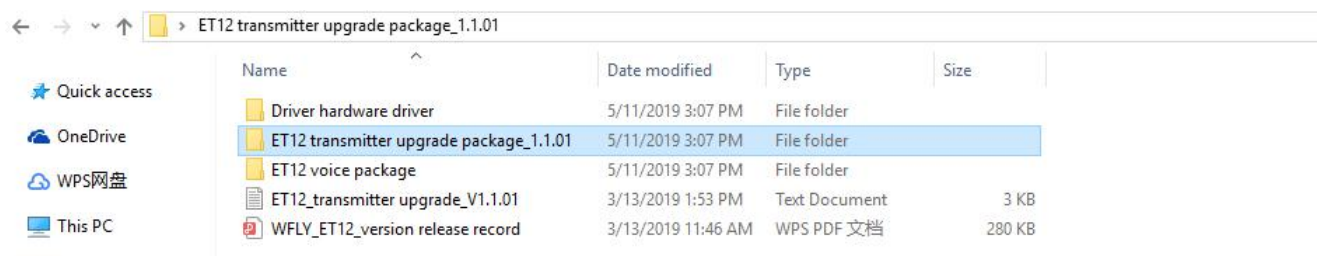

▲ The ET12 upgrade package -unzip- without unzip can also be used.

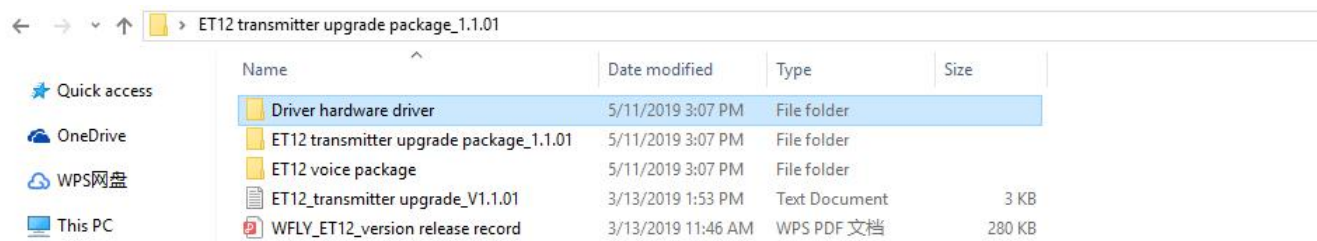

▲ ET12 upgrade package: Open the Driver hardware Driver

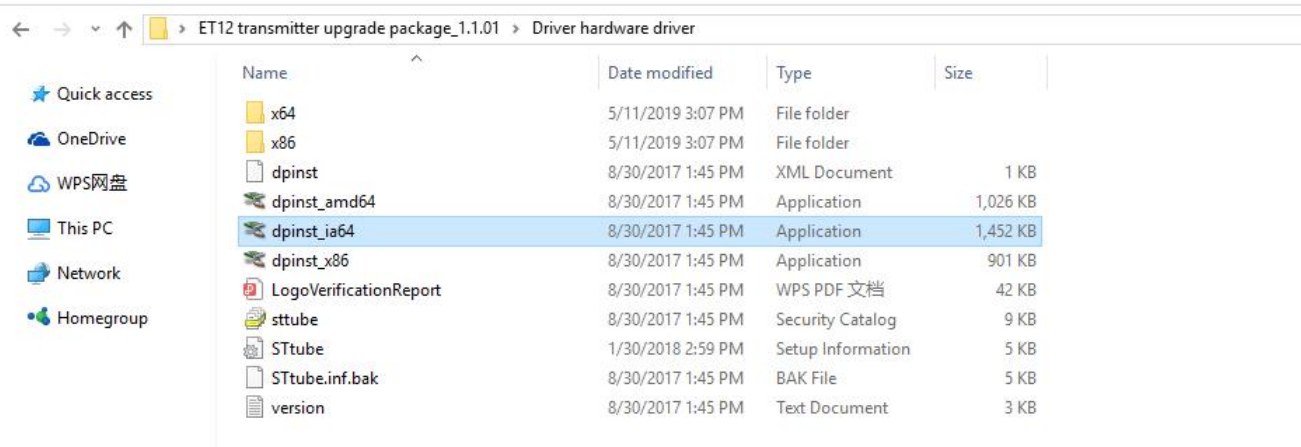

▲ For 64-bit operating system, please install "dpinst_amd64.exe" and double click to run the installer, the corresponding driver will be installed automatically.

ET12 transmitter upgrade package_1.1.01 > Driver hardware driver				
Name	Date modified	Type	Size	
x64	5/11/2019 3:07 PM	File folder		
x86	5/11/2019 3:07 PM	File folder		
dpinst	8/30/2017 1:45 PM	XML Document	1 KB	
dpinst_amd64	8/30/2017 1:45 PM	Application	1,026 KB	
dpinst_x86	8/30/2017 1:45 PM	Application	1,452 KB	
dpinst_x86	8/30/2017 1:45 PM	Application	901 KB	
LogoVerificationReport	8/30/2017 1:45 PM	WPS PDF 文档	42 KB	
sttube	8/30/2017 1:45 PM	Security Catalog	9 KB	
STtube	1/30/2018 2:59 PM	Setup Information	5 KB	
STtube.inf.bak	8/30/2017 1:45 PM	BAK File	5 KB	
version	8/30/2017 1:45 PM	Text Document	3 KB	

▲ Please install "dpinst_x86.exe" for 32-bit operating system. Double-click the installer and the corresponding driver will be installed automatically.



2nd step: Operation System Upgrade(OS Upgrade)


◆ T12 transmitter starting up -- System Setting -- Information -- transmitter connects computer with USB cable, upgrades software, click 《upgrade》 "blue light" slow flash, enter the upgrade state.

ET12 transmitter upgrade package_1.1.01				
Name	Date modified	Type	Size	
Driver hardware driver	5/11/2019 3:07 PM	File folder		
ET12 transmitter upgrade package_1.1.01	5/11/2019 3:07 PM	File folder		
ET12 voice package	5/11/2019 3:07 PM	File folder		
ET12_transmitter upgrade_V1.1.01	3/13/2019 1:53 PM	Text Document	3 KB	
WFLY_ET12_version release record	3/13/2019 11:46 AM	WPS PDF 文档	280 KB	


◆ Open the folder "ET12_transmitter upgrade _v1.1.01", and update the remote control software. Please pay attention to choosing the correct upgrade package. If you choose the wrong upgrade package, the software will be lost and the remote controller will be out of order.

ET12 transmitter upgrade package_1.1.01 > ET12 transmitter upgrade package_1.1.01				
Name	Date modified	Type	Size	
APP000.dfu	3/4/2019 10:11 AM	DFU File	944 KB	
ET12 transmitter.exe	12/15/2018 10:32 ...	Application	2,213 KB	
STDFU.dll	8/30/2017 1:45 PM	Application extens...	356 KB	
STDFUFiles.dll	12/15/2018 10:21 ...	Application extens...	1,389 KB	
STDFUPRT.dll	12/15/2018 10:21 ...	Application extens...	1,409 KB	
STTubeDevice30.dll	8/30/2017 1:45 PM	Application extens...	1,680 KB	

◆ Run the "ET12 transmitter. exe" upgrade tool, and the interface displays the detected Device name "STM Device in DFU Mode" to upgrade.

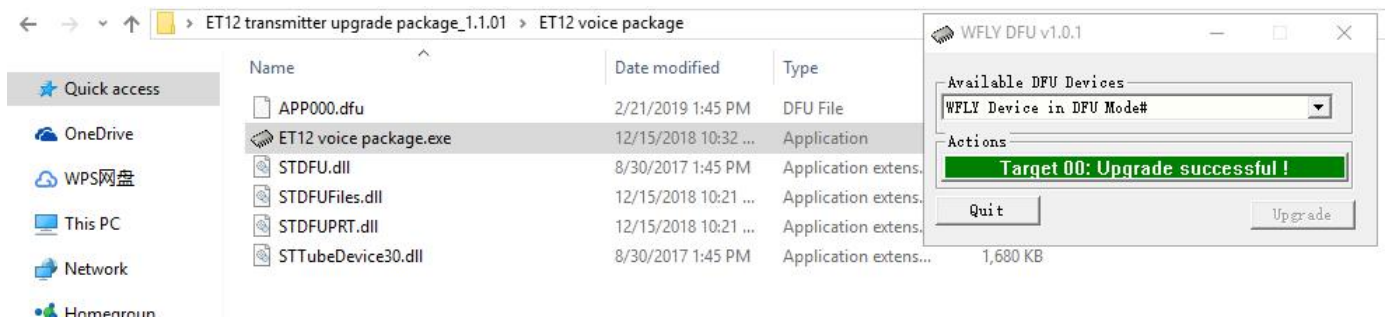

◆ To continue upgrading, click the "Upgrade" button of the Upgrade tool. When the interface progress says "Upgrade successful!" After the upgrade, disconnect the USB connection (cut off the power supply), power on and restart. The remote control does not disconnect the USB cable connection, which will affect the normal starting up.

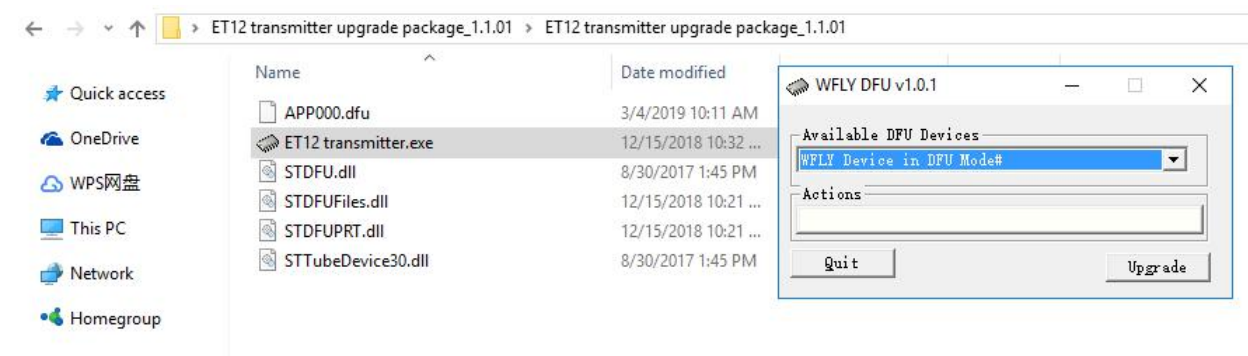


◆ To cancel the upgrade, click the "Quit" button in the upgrade tool interface or the "X" closing window button in the upper right corner to close the upgrade tool.




3rd step: Voice package upgrade


• ET12 remote control starting up-- System Setting -- Information -- remote control connects computer with USB cable, upgrades voice, click "voice" "red light" slow flash, enter the upgrade state.

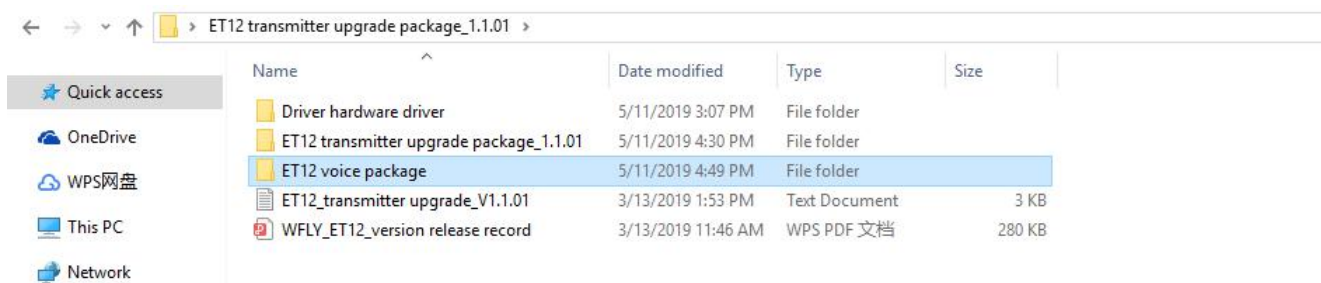


- Open the "ET12_voice package" folder and remote controller voice upgrade. Please pay attention to choosing the correct upgrade package. If you choose the wrong upgrade package, the software will be lost and the remote controller will be out of order.

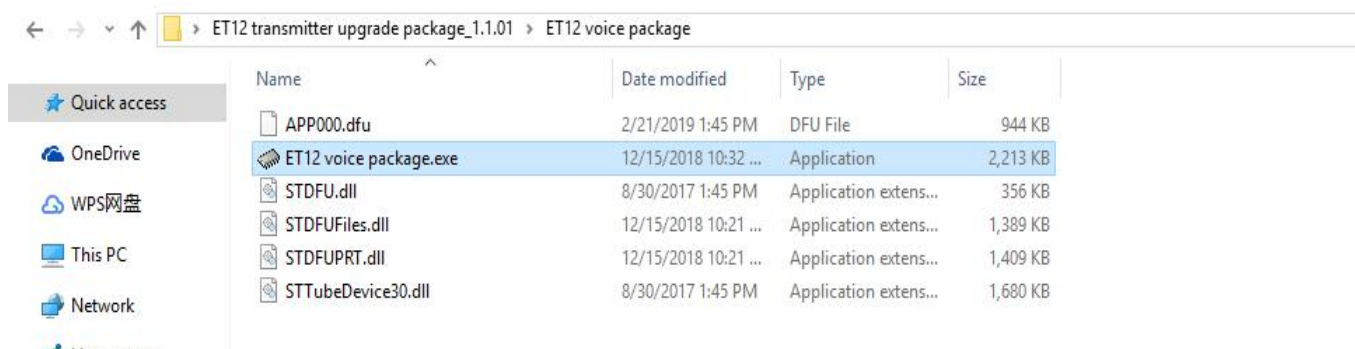

- Run the "ET12 voice package. exe" upgrade tool, and the interface will display the detected Device name "STM Device in DFU Mode" to upgrade

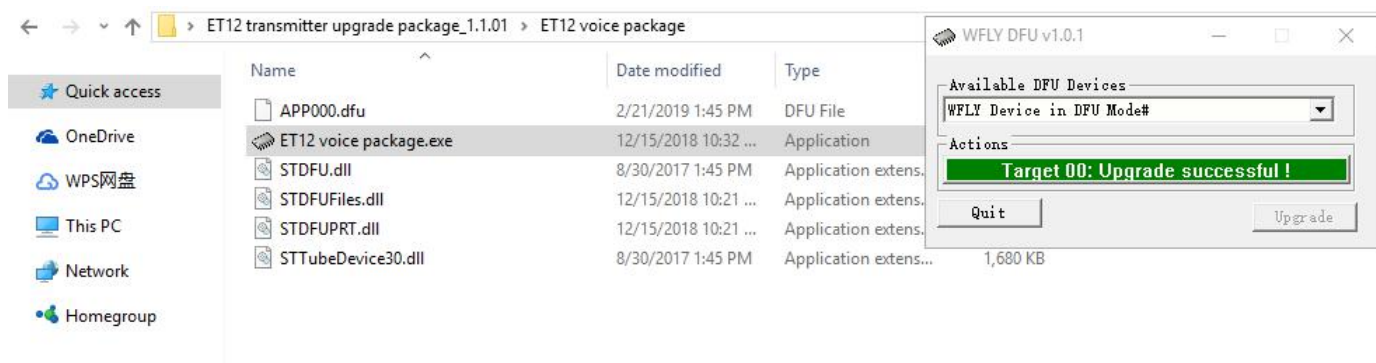

- To continue upgrading, click the "Upgrade" button of the Upgrade tool. When the interface progress says "Upgrade successful!" After the upgrade, disconnect the USB connection (cut off the power supply) and restart. The remote control does not disconnect the USB cable connection, which will affect the normal starting up.

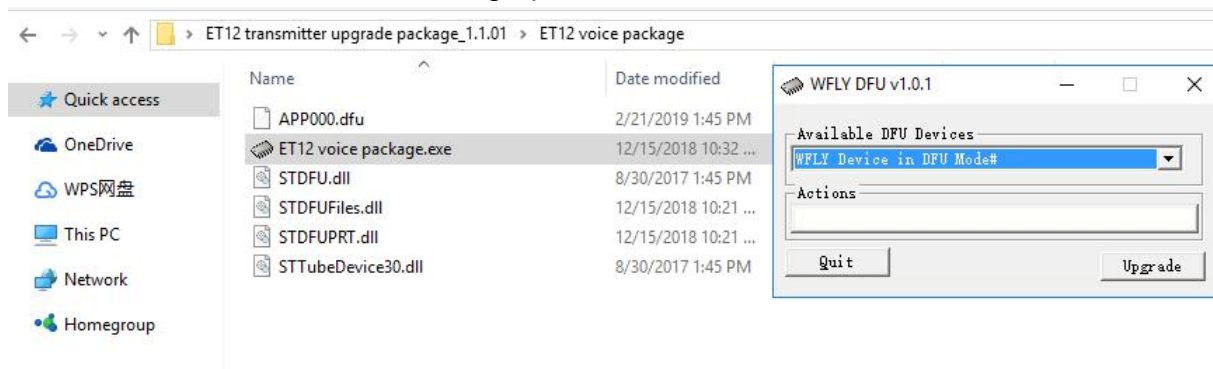

- To cancel the upgrade, click the "Quit" button in the upgrade tool interface or the "X" closing window button in the upper right corner to close the upgrade tool.

Tips:

1. The upgrade process cannot be interrupted, which will cause software loss and prevent the remote control from booting normally.
2. (Voice) upgrade error may be caused by conflicts of computer plug-ins (such as software environment such as flight control). You can replace the computer (or WIN7 system) and try again.
3. If the upgrade fails, you cannot turn on the computer. Use the forced upgrade. Press the HOME / MON button on the remote control to connect the USB upgrade software. Press the FN button on the remote control to connect the USB to upgrade the voice.
4. If the upgrade cannot be completed, please contact the after-sales factory to upgrade.

Aftersale service address:4th Floor,C2 Building,Xiangli Industrial Park, Heping Haoye Road,Fuyong Town,Bao'an District, Shenzhen,Guangdong Province,China

Email:service@wflysz.com